


# BELLEVE

COLLECTION

PORCELÁNICO · PORCELAIN



## COLORES / COLOURS

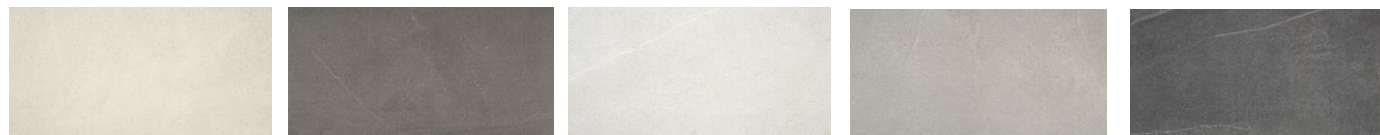

IVORY

STONE

WHITE

GREY

GRAPHITE

### FORMATO / SIZE

### ACABADO / FINISHED

### GRUPO / GROUP

120X120 cm. RECT  
47"X47" RECT

60X120 cm. RECT  
24"X47" RECT

75X75 cm. RECT  
30"X30" RECT

60X60 cm. RECT  
24"X24" RECT

30X60 cm.  
12"X24"

45x45 cm.  
18"X18"

Mate/Matt  
INOUT

Bla

### UNE-EN 14411:2016

DESCRIPCIÓN DEL TEST TEST DESCRIPTION	NORMA STANDARD	VALOR DEL TEST TEST VALUE	RESULTADO RESULT
ABSORCIÓN DE AGUA / WATER ABSORPTION	UNE-EN-ISO 10545-3	Ev ≤ 0,5%	Cumple / Complies
FUERZA DE ROTURA / BREAKING STRENGTH	UNE-EN-ISO 10545-4	≥ 1300 N	Cumple / Complies
RESISTENCIA A LA FLEXIÓN / MODULUS OF RUPTURE	UNE-EN-ISO 10545-4	≥ 35 N/mm2	Cumple / Complies
ABRASIÓN SUPERFICIAL / SURFACE ABRASION	IVORY STONE WHITE GREY GRAPHITE UNE-EN-ISO 10545-7	Valor declarado/ Declared value	Clase 4 / Class 4 Clase 3 / Class 3 Clase 4 / Class 4 Clase 4 / Class 4 Clase 3 / Class 3
RESISTENCIA AL CUARTEO / CRAZING RESISTANCE	UNE-EN-ISO 10545-11	Requerido / Requested	Cumple / Complies
RESISTENCIA A LA HELADA / FROST RESISTANCE	UNE-EN-ISO 10545-12	Requerido / Requested	Cumple / Complies
RESISTENCIA QUÍMICA / CHEMICAL RESISTANCE	PRODUCTOS DOMÉSTICOS Y ADITIVOS PISCINAS / HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS UNE-EN-ISO 10545-13	Mínimo clase B / Minimum class B	Cumple / Complies
	ÁCIDOS A BAJA CONCENTRACIÓN / LOW CONCENTRATION OF ACIDS UNE-EN-ISO 10545-13	Valor declarado/ Declared value	Mínimo clase LB / Minimum class LB
	BASES A BAJA CONCENTRACIÓN/ LOW CONCENTRATION OF ALKALIS UNE-EN-ISO 10545-13	Valor declarado/ Declared value	Mínimo clase LB / Minimum class LB
RESISTENCIA A LAS MANCHAS / RESISTANCE TO STAINS	UNE-EN-ISO 10545-14	Mínimo clase 3 / Minimum class 3	Cumple / Complies
RESISTENCIA AL DESLIZAMIENTO / SLIP RESISTANCE	UNE-41901 EX Péndulo / Pendulum		Clase 3 / Class 3
	BS 7976-2:2002 +A1:2013 Resistencia al deslizamiento (Péndulo): Método operativo (PTV) / Slip resistance (Pendulum): Pendulum test value (PTV)		+36
	ANSI A137. 1: 2017. 9.6 Coeficiente de fricción dinámico (D.C.O.F.) / Dynamic coefficient of friction (D.C.O.F.)		>0.63
	DIN 51130:2014-5 Ángulo crítico deslizamiento (Rampa) / Critical angle of slip (Inclined platform)		R10
	DIN 51097 Ángulo crítico deslizamiento zonas húmedas de andar descalzo / Critical angle of slip wet-loaded barefoot areas		Clase C / Class C
RESISTENCIA AL RAYADO / HARDNESS (MOHS)	EN-101	Valor declarado/ Declared value	Mínimo 3 / Minimum 3